

(30) Priority Data:

60/071,983

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

WO 99/36876 (51) International Patent Classification 6: (11) International Publication Number: **A2 G06K** 22 July 1999 (22.07.99) (43) International Publication Date:

US

PCT/US99/01296 (21) International Application Number:

(22) International Filing Date: 20 January 1999 (20.01.99)

20 January 1998 (20.01.98)

(71) Applicant: DIGIMARC CORPORATION [US/US]; Suite 500, One Centerpoint Drive, Lake Oswego, OR 97035 (US).

(72) Inventors: RHOADS, Geoffrey; 304 S.W. Tualatin Loop, West Linn, OR 97068 (US). GUSTAFSON, Ammon; 13305 Lacewood Street, Beaverton, OR 97008 (US).

(74) Agent: GALBI, Elmer; 13314 Vermeer Drive, Lake Oswego, OR 97035 (US).

(81) Designated States: AU, BR, CA, IL, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: MULTIPLE WATERMARKING TECHNIQUES

(57) Abstract

Multiple digital watermarks, of which has different characteristics, are embedded in a document. The characteristics of the various watermarks are chosen so that each of the watermarks will be affected in a different manner if the document is subsequently copied and reproduced. detection process or mechanism reads each of the watermarks and compares their While wear and handling characteristics. may change the characteristics of the digital watermarks in a document, the relationship between the characteristic of multiple digital watermarks in a document will nevertheless give an indication as to whether a document is an original or a copy of an original.

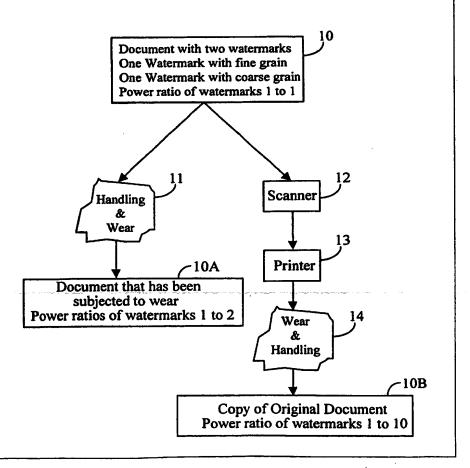

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali '	TT	Trinidad and Tobago
ВЈ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of Americ
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
СН	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	Ll	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

MULTIPLE WATERMARKING TECHNIQUES

2 Field of the Invention:

3 The present invention relates to steganography and more particularly to the use of

4 watermarks to determine the authenticity and history of a particular document or

5 image.

6

7

l

Background of the Invention:

8 Steganographic and digital watermarking technologies are well know. For example

9 see U.S. Patent 5,636,292 and the extensive references cited therein. Also see

copending patent applications serial number 08/327,426 which was filed 10/21/94

and copending application serial number 08/436,134 which was filed 5/8/95.

12

13

14

; 7

18

The technology for inserting digital watermarks in images and the technology for

reading or detecting digital watermarks in images is well developed, well known and

described in detail in public literature. Furthermore, there are commercially

available products which include programs or mechanisms for inserting digital

watermarks into images. For example the commercially available and widely used

products "Adobe Photoshop" which is marketed by Adobe Corporation of San Jose

19 California and "Corel Draw" program which is marked by Corel Corporation of

Ontario Canada, include a facility for inserting digital watermarks into images.

21

1.5

20

The technology for making high quality copies of documents is widely available.

The technical quality of scanners and color printers has been increasing rapidly.

Today for a relatively low cost one can purchase a high quality scanner and a high

quality color printer. Thus, it is becoming increasingly easy to duplicate documents.

The ability to create high quality copies has created a need for technology which

27 can differentiate between original documents and copies of the original.

It is known that watermarks can be used to help differentiate genuine documents 2 from copies. However, the prior art techniques for using digital watermarks to 3 4 differentiate genuine documents from copies have serious limitations. The present 5 invention is directed to an improved technique for using steganography and digital 6 watermark technology to facilitate differentiating original documents from copies of 7 the original. 8 9 The present invention can also be used for various other purposes such as to 10 embed multiple types of information in a single document or to provide watermarks 11 which enable documents to perform special functions. . 12 13 Summary of the Invention: 14 With the present invention multiple digital watermarks, each of which has different 15 characteristics are embedded in a document. The characteristics of the two 16 watermarks are chosen so that each of the watermarks will be affected in a different 17 manner by what may subsequently happen to the document. 19 The detection process or mechanism reads the two digital watermarks and 20

18

compares their characteristics. While wear and handling may change the characteristics of the individual watermarks, the relationship between the characteristic of the two watermarks will never-the-less give an indication as to whether a document is an original or a copy of an original.

24

25

26

27

21

22

23

For example according to the present invention two digital watermarks in a document may have different energy levels. The absolute energy level of a digital watermark in an original image may be decreased if a document is subject to wear. WO 99/36876 PCT/US99/01296

3

1	Likewise the energy level of the digital watermark in an image may be decreased if
2	an image is scanned and reprinted on a color printer. However, the relationship
3	between the energy level of the two digital watermarks will be different in an image
4	that has been subject to wear and in a reproduced image. Likewise if two digital
5 .	watermarks are introduced into an image where the bit pattern used to construct the
6	digital watermarks have different patterns, the ratio between the signal to noise ratio
7	of the watermarks will be different in an original subject to wear and in a copy
8	generated by scanning the original and printing the scanned image. Other
9	characteristics of multiple digital watermarks can also be used to differentiate
;0	original documents from copies.
11	
12	Brief Description of the Figures:
13	Figure 1 shows the paths that a document and a copy may follow.
14	Figures 2A and 2B show a fine grain and a course grain watermark.
15	Figure 3A and 3B show a geometrically linear and a geometrically random
16	assignment of pixels to a bit in a digital watermark.
17	Figure 4 illustrates a fourth embodiment of the invention.
38	
19	Detailed Description of preferred embodiments:
20	The problem of differentiating an original document from a copy is made more
21	difficult in situations where the original document is subject to being handled, worn,
22	folded and otherwise damaged. Many original documents such as identification
23	documents and currency are extensively handled. The wear to which such
24	documents are subjected reduces the quality of images on the document and
25	therefore reduces the quality of any information embedded in the document using
26	conventional steganographic techniques.

27

ı	With the present invention a number of different watermarks are embedded in a
2	document. Each of the watermarks embedded in the document, has different
3	characteristics. All watermarks are somewhat affected when a document is
4	subjected to wear, and all watermarks are somewhat affected when a document is
5	duplicated by being scanned and reprinted. However, the magnitude of the effect
6	caused by being scanned and reprinted on watermarks with certain characteristics
7	is much greater than the effect on watermarks with different characteristics.
8	Likewise, wear and handling of a document affects watermarks with certain
9	characteristics much more than it affects watermarks with different characteristics.
10	•
11	Thus, if multiple watermarks with different characteristics are inserted into a
12	document, it is possible to differentiate a copy from an original document that has
13	been subjected to wear by examining the ratios of characteristics of the watermarks
14	in the image being examined.
15	
16	In order to print a document on a color printer, the document is put through a
17	transformation from a color space such as the RGB color space to a different color
18	space such as the CMYK (cyan, magenta, yellow, black) color space. Such
19	transformations are well know. For example see chapter 3 entitled "Color Spaces"
20	in a book entitled "Video Demystified, A handbook for the Digital Engineer", Second
21	Edition, by Keith Jack, published by Harris Semiconductor and Hightext Publications
22	of San Diego, California.
23	
24	When an image is transformed from one color space to another color space, noise
25	is introduced into the image Among the reasons for this is the fact that each color
26	space has its own distinctive gamut (or range) of colors. Where the gamut of two
27	color spaces overlap, the conversion from one color space to another color space

- can in theory be precise. However, there will be some areas which are in the gamut 1 2 of one color space not in the gamut of another color space. Such situations definitely introduce noise into the conversion process. Even in areas that are in the 3 gamut of two color spaces, conversion from one color space to another color space 4 introduces noise because of such things as round off errors. The present invention takes advantage of the fact that if an original is copied and then a copy is printed, 6 the image on the printed copy will have gone through several conversions to which 7 . the original will not have been subjected. For example, the conversions to which a 8 copy may be subjected 0, are: 1) a document to RGB conversion (i.e. scanning the document into the computer), i l 12 2) a RGB to CMYK conversion, 13 3) a CMYK to copy conversion (i.e. printing the document). Any characteristics of the two digital watermarks that will be affected differently by 14 15 the additional conversion process to which copies are subjected can be used to differentiate copies from an original. Since the two watermarks with different 16 17 characteristics are affected in a different manner by the additional conversion step, 18 a comparison of the characteristics of the two watermarks in a document being 19 examined will indicate if the document is an original (which has not gone through 20 the additional conversions) or a copy which has gone through the additional 21 conversions. While the characteristics of each watermark will have been changed 22 by wear and by the copying process, the comparison between the characteristics of 23 the two watermarks will still be able to differential a copy from an original. 24
- 25 Four embodiments of the invention are described below. Each of the embodiments
- 26 utilizes two watermarks in a document. The differences between the two
- 27 watermarks in the document are as follows:

1	In the first embodiment:
2	First watermark: Has fine grain
3	Second watermark: Has a course grain
4	In the second embodiment:
5	First watermark: Has geometrically linear assignment of pixels
6	Second watermark: Has geometrically random assignment of pixels.
7	In the third embodiment:
8	First watermark: Has low power
9	Second watermark: Has higher power
10	In the fourth embodiment:
11	Fist watermark: uses standard RGB to HSI and HSI to RGB transformations
12	Second watermark is biased before being transformed from HSI to RGB.
13	
14	Figure 1 shows the steps to which documents and copies are typically subjected. In
25.	the normal course, a document 10 may be subjected to handling and wear 11
16	resulting in a worn document 10A. Document 10 may also be scanned as illustrated
17	by box 12. The scanning produces a digital image which can be printed as
18	illustrated by box 13. The printed image may be subjected to handling and wear 14
19	resulting in a copy 10B. It is noted that the document 10 may also be subject to
20	handling and wear prior to the scanning operation 12. The task to which this
21	invention is directed is the task of differentiating the worn document 10A from the
22	copy 10B.
23	
24	The document 10 includes an image (not explicitly shown) which has two digital
25	watermarks inserted therein. In the first embodiment of the invention, the first
26	watermark has a fine grain and the second watermark has a course grain. The
27	grain of the two watermarks is illustrated in Figure 2. Figure 2.4 shows the grain of

1	the first watermark and figure 2B shows the grain of the second watermark. The
2	first watermark uses blocks of 9 pixels (a 3 by 3 block). Each of the pixels in each 9
3	pixel block has its gray value changed by the same amount. For example Figure 2A
4	shows that the first 9 pixel block has its gray value increase and the second 9 pixel
5 4	block has its gray value decreased. The amount of increase and the selection of
6 -	blocks that is increased and decreased is conventional.
7	•
8	As shown in Figure 2B, the grain of the second watermark is in blocks that are 6
9	pixels by 6 pixels or 36 pixels. All of the pixels in each 36 pixel block are changed
0	by the same amount.
I	
2	In the original document 10, the two watermarks have a power ratios of 1 to 1. After
3	wear and handling, the power of the first watermark will be degraded somewhat
4	more than the power of the second watermark. For example, as illustrated in Figure
5	1, after document 10 is subjected to handling and wear, a detector which reads the
6	watermarks might find that the power ratio of the water marks is 1 to 2.
.7	
8	If the document 10 is scanned and the resulting digital image is printed to make a
9	copy of the document 10, the ratio of the power of the watermarks will be affected
0	much more than the effect of handling and wear. For example as illustrated in
1	Figure 1, the power ratio of the watermarks may be 1 to 10, thereby allowing one to
22	differentiate the worn original document 10A from the copy 10B.
23	
.4	It is noted that the mechanism for inserting watermarks into an image is well known
.5	as is the technique for reading a watermark and using correlation techniques to
.6	determine the signal to noise ratio (i.e. the power) of a watermark.

27

]	Figures 3A and 3B shown an alternative technique for implementing the present
2	invention. In the second embodiment of the invention, the two watermarks inserted
3	into the image on a document have different patterns of assigning pixels to the bits
4	of the number which the watermark represents. The first watermark utilizes a
5	geometrically linear assignment of pixels to each bit. For example Figure 3A shows
6	an image that has 500 by 500 pixels. Considering a watermark with 50 bits, each
7	bit of the watermark would have 5000 pixels assigned to represent that bit. A linear
8	assignment could have each fifth bit in each row (100 bits per row) and each fifth
9	row (50 rows) assigned to each bit of the watermark. Thus 5000 pixels would be
0	assigned to each bit in a very orderly or linear manner.
1	
2	In the second watermark the pixels would be assigned to each bit in a random
3	manner as shown in Figure 3B. Each bit in the watermark would still have 5000
4	assigned bits; however, the pixels would be a random location over the image.
5	Naturally it should be understood that Figure 3A and 3B illustrate how pixels are
6	assigned to one bit of the watermark. The other bits of the watermarks would have
7	pixels assigned in a similar manner.
8	
9	Similar to the first embodiment of the invention, the watermark with a linear
0.	assignment of pixels and the watermark with a random assignment of pixels would
2.1	be affected differently by handling and wear on the original document than they
.2	would be by being scanned and reprinted.
.3	
2.4	The third embodiment of the invention described herein utilizes watermarks which
5	have different power levels. Handling and wear as contrasted to scanning and
ó	printing would affect a watermark with a low power level differently than a water
27	mark with a high power level. Watermarks with different power levels can be

inserted into a document in order to practice the present invention utilizing i 2 commercially available programs such as Adobe Photoshop or Corel Draw. In the Adobe Photoshop and Corel Draw programs, the power or intensity of the 3 watermark can be adjusted by setting a simple control setting in the program. 4 5 6 The fourth embodiment of the invention introduces different characteristics into two 7 watermarks by modifications made to one of the watermarks during the initial step 8 during which the watermarks are introduced into an image. The operation of the 9 fourth embodiment can be explained as shown in Figure 4. First as illustrated by 10 equation 1 there is a conversion from RGB to HSI as is conventional. This is 11 illustrated by equation 1. As illustrated by equation 2, the first watermark is inserted 12 into the image in a conventional manner by modifying the I value in the HSI 13 representation of the image using the first watermark values (designated as WM1 11 Δ). A first RGB value designated RGB(1) is then calculated using a conventional 15 transformation designated T. As indicated by equation 3, the second watermark 16 WM2 is then biased toward a particular color and the biased watermark is then 17 combined with the HSI values and transformed to a second set of RGB values 18 designated RGB(2). Finally as indicated by equation 4, the values RGB(1) and 19 RGB(2) are combined to form the watermarked image designated RGB(F). 20 21 The transform used to go from RGB to HSI color space (indicated in equation 1 in 22 Figure 4) can be anyone of a variety of known other techniques. For example, the 23 RGB to HSI conversion can be one of the techniques explained in the above 24 referenced text book such as the following: (which assumes that RGB and Intensity 25 have a value range of 0 to I and that Red equals 0°):

26 First calculate:

M = max(R,G,B)

```
m = min(R,G,B)
```

$$r = (M-R)/(M-m)$$

$$g = (M-G)/M-n$$

4
$$b = (M-B) / (M-m)$$

- 5 Then calculate I, S, and H as follows:
- 6 a) I = (M + M)/2
- 7 b) if M = m then S = 0 and H = 180
- 8 if I < or = 0.5 then S = (M-m)/(M+m)
- 9 if I > 0.5 then S = (M-m) / (2-M-m)
- c) if R = M then H = 60 (b-g)
- if G = M then H = 60 (2 + r b)
- if B = M then H = 60(4 + g r)
- if H > or = 360 then $H = H \cdot 360$
- if H < 0 then H = H + 360
- 15 The first watermark in inserted into the RGB values in a conventional manner by
- 16 modifying the I value of appropriate pixels so as to combine the watermark Δ values
- with HSI values. This is indicated by equation 2 in Figure 4. Next as indicated by
- 18 equation 3 in Figure 4, the HSI values are converted to RGB values using a
- 19 transform "T". The transform "T" can be conventional and it can for example be
- 20 done as follows:
- 21 First calculate:

22 if
$$I < or = 0.5$$
 then $M = I(I + S)$

- if I > 0.5 then M = I + S IS
- m = 21 M
- if S = 0 then R = G = B = I and $H = 180^{\circ}$
- Then calculate R, G and B as follows:
- 27 a) if H < 60 then R = M

```
]
       if H < 120 then R = rn + ((M-m) / ((120- H) / 60))
2
       if H < 240 then R = m
       if H < 300 then R = m + ((M - m) / ((H - 240 / 60)))
3
4
       otherwise R = M
5
6
     b) if H < 60 then G = m + ((M-m)/(H/60))
7
       if H < 180 then G = M
       if H < 240 then G = m + ((M - m) / ((240 - H_ / 60)))
8
9
       otherwise G = m
10
     c) if H < 120 then B = m
        if H < 180 then B = m + ((M - m) / ((H-120/60)))
11
12
        if H < 300 then B = M
13
        otherwise B = m + ((M - m) / ((360 - H) / 60))
14
15
     Next the values which represent a second watermark are used to calculate a
     second set of RGB values designated RGB2. In order to calculate RGB2, the
16
17
     values of H and S are modified so that they are slightly biased toward a particular
18
     color designated H1 and S1 New values for H and S are calculated as follows:
19
     (Note, H1 must be between 0 and 360, S1 must be non-negative and can be
20
     between 0 and 1 and X is a value between 0 and 1)
21
     Calculate new values for H and S as follows:
22
     If H > H1 then H = H - (H - H1) x
23
               else H = H + (H1 - H)x
24
     If S > S1 then S = S - (S - S1)x
```

25

26

else S = S + (S1 - S) x

Next add the second watermark to the values of HSI and transform these values to

the RGB color space as indicated by equation 3. The transformation from HSI color

space to RGB color space is done as previously indicated.

4

5 Finally as indicated by equation 4 in Figure 4, the final RGB value (designated

6 RGBF) is calculated by combining the values of RGB1 and RGB2. This

7 combination can be done in a variety of known ways.

8

)

1

:2

It is noted that in the Boove example the difference between the transformation

used for the first and the second watermarks involves biasing the values of H and S.

Alternatively a wide variety of different changes could also be made. The key to

this fourth embodiment of the invention is that in effect a different transformation is

used for the first and the second watermarks

14

15

17

. 9

3.7

22

23

24

25

26

13

While four embodiments of the invention have been shown herein, it should be

understood that many other characteristics and attributes of a digital watermark

could be used to practice the present invention in addition to the characteristics and

45 attributes described herein. Furthermore other known digital watermarking.

techniques can be used together with and applied to the digital watermarks used for

the present invention. It is also noted that while in the above examples only two

21 watermarks were used, in some situations one could use three, four five or more

watermarks. That is, the embodiments of the invention specifically described herein

utilize two watermarks. It should be understood that any number of watermarks

could be utilized in him manner. Furthermore while the embodiments shown herein

utilize two separate wetermarks, the two watermarks used to practice the present

invention could be combined into one watermark which has a plurality of separate

identifiable and measurable characteristics.

WO 99/36876 PCT/US99/01296

13

1

2 It is noted that while the present invention utilizes multiple watermarks with different

3 characteristics to differentiate original documents from copies of the original, one

4 can also utilizes multiple watermarks with different characteristics for other reasons.

5 Documents may include multiple similar watermarks in addition to the watermarks

which have different characteristics according to the present invention. As used

7 herein, in general, the term "document" refers to a physical entity.

8

6

9 While the present invention has been described with respect to four specific

embodiments of the invention, it should be understood that various changes in

forma and detail could be made without departing from the spirit and scope of the

invention. The scope of the present invention is limited only by the appended

13 claims.

1	I claim
2	1) A document which has embedded therein a first digital watermark having a first
3	set of characteristics and a second watermark having a set of characteristics which
4	differ from said first set of characteristics.
5	
6	2) The document recited in claim 1 wherein said first watermark has a different
7	energy level from said second watermark.
8	
9	3) The document recited in claim 1 wherein said first and second watermarks have
0	bit patterns and wherein the bit patterns which comprise said first watermark are
1	different from the bit patterns which comprise said second watermark
2	
3	4) A method of creating a watermarked image which comprises the steps of:
14	modifying an HSI (hue, saturation, Intensity) representation of an image to imbed
15	first watermarked in said image and create a first watermarked image,
16	transforming said first watermarked image to the RGB (red, green, blue) color
17	space,
18	biasing the values which represent a second watermark toward a particular color,
19	modifying a said HSI values to imbed said biased second watermarked in said
20	image and create a second watermarked image,
21	transforming said second watermarked image to the RGB color space, and
22	combining the values first and second watermarked images to create a final
23	watermarked image.
7 1	

5) The method recited in claim 4 wherein said biasing is toward a particular color.

25

1 6) A method of differentiating copies of an original document from the original 2 document comprising, said document containing a first digital watermark which has a first set of characteristics and a second digital watermark which has a second set 3 4 of characteristics, reading said first and second watermarks from said original document and 5 comparing the resultant values to generate a first set of results, 6 7 reading said first and second watermarks from said copy of said original document 8 and comparing the resulting values to generate a second set of results, and 9 using differences between said first and second sets of results to differentiate an 10 original document from a copy of said original document. 11 12 7) The method recited in claim 6 wherein said first digital watermark has a first 13 energy level and said second watermark has a second energy level. 14 8) The method recited in claim 6 wherein said first watermark has a first bit pattern 15 16 and said second watermark has a different bit pattern. 17 9) The method recited in claim 6 where both said original document and said copy 18 19 have been subjected to wear. 20 21 10) The document recited in claim 1 wherein said second watermark was been biased toward a particular color before it was inserted in said document. 22 23 21 A method of differentiating an original document from a copy of said document, 25 said document having first and second watermarks imbedded therein, comprising 26 the steps of comparing the characteristics of the said first and second watermarks in

1	said original document and comparing the characteristics of said first and second
2	watermarks in said copy.
3	
4	12) the method recited in claim 11 wherein said first and second watermarks have
5	different grain structures.
6	
7	13) The method recited in claim 11 wherein said first and second watermarks have
8	different intensity levels.
9	
10	14) The method recited in claim 12 wherein said first and second watermarks have
11	different characteristics.
12	
13	15) A document which contains an image which has embedded therein a plurality of
14	watermarks, each of said watermarks having characteristics which differ from each

15

other.

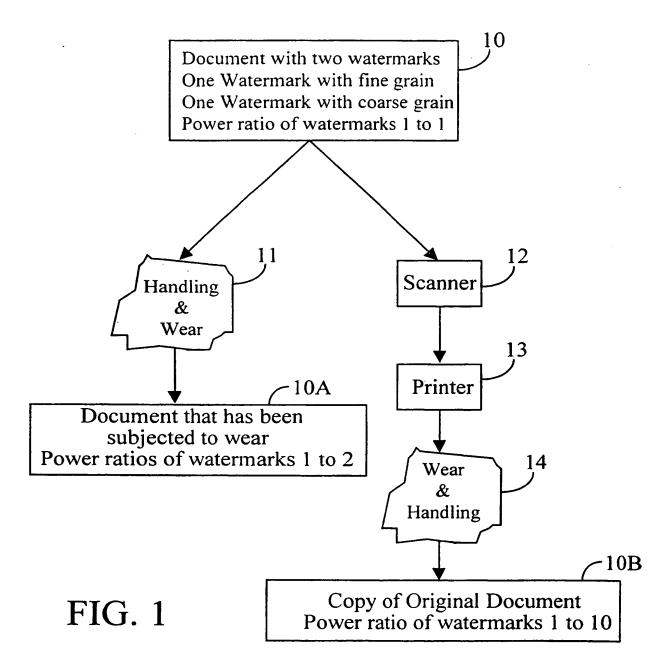


FIG. 2A

Watermark with a fine grain (each block of pixels is 3 by 3)



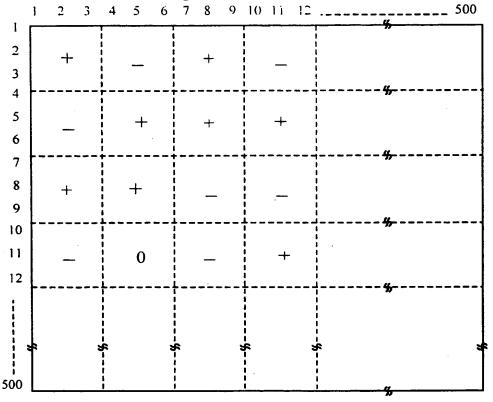


FIG. 2B


Watermark with a coarse grain (each block of pixels is 6 by 6)

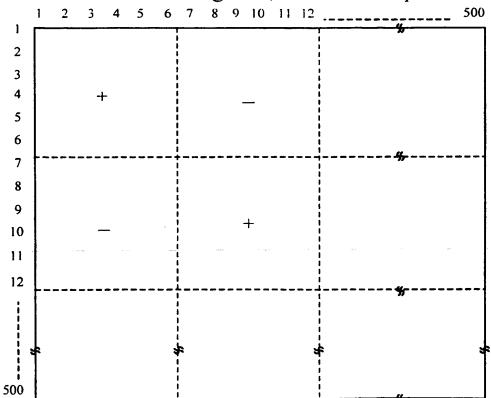

 $FIG.\ 3A$ Geometrically linear assignment of pixels to each bit

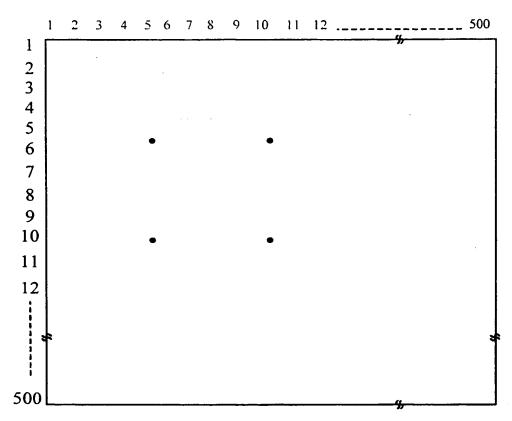

 $FIG.\ 3B$ Geometrically random assignment of pixels to each bit

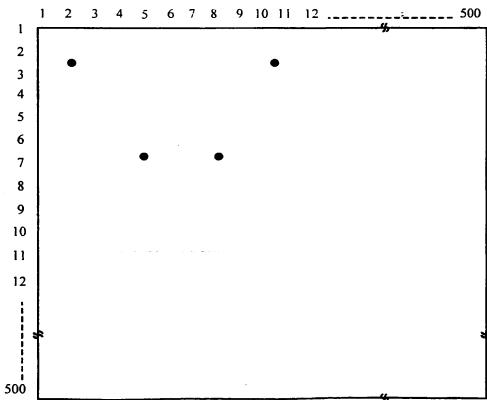

- (1) RGB——HSI
- (2) First Watermark

$$HSI + WMI\Delta$$
 $\xrightarrow{T} RGB1$

(3) Second Watermark

(4) Final image (RGB1 + RGB2)/2 = RGBF

FIG. 4

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:
G06K 9/00
A3
(11) International Publication Number: WO 99/36876
(43) International Publication Date: 22 July 1999 (22.07.99)

(21) International Application Number:

PCT/US99/01296

(22) International Filing Date:

20 January 1999 (20.01.99)

(30) Priority Data:

60/071,983

20 January 1998 (20.01.98)

Published US With

With international search report.

IE, IT, LU, MC, NL, PT, SE).

(71) Applicant: DIGIMARC CORPORATION [US/US]; Suite 500, One Centerpoint Drive, Lake Oswego, OR 97035 (US).

(72) Inventors: RHOADS, Geoffrey; 304 S.W. Tualatin Loop, West Linn, OR 97068 (US). GUSTAFSON, Ammon; 13305 Lacewood Street, Beaverton, OR 97008 (US).

(74) Agent: GALBI, Elmer; 13314 Vermeer Drive, Lake Oswego, OR 97035 (US).

(88) Date of publication of the international search report:

(81) Designated States: AU, BR, CA, IL, JP, KR, MX, European


patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR,

23 September 1999 (23.09.99)

(54) Title: MULTIPLE WATERMARKING TECHNIQUES

(57) Abstract

Multiple digital watermarks (10), each of which has different characteristics, are embedded in a document. The characteristics (2, 3) of the various watermarks are chosen so that each of the watermarks will be affected in a different manner if the document is subsequently copied and reproduced. The detection process or mechanism reads each of watermarks and compares characteristics. While wear and handling (11, 14) may change the characteristics of the digital watermarks in a document, the relationship between the characteristic of multiple digital watermarks in a document will nevertheless give an indication as to whether a document is an original or a copy of an original.

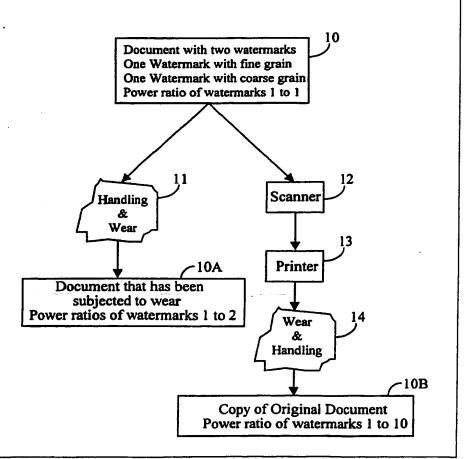

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

	A 10 1-	ES	Spain	LS	Lesotho	SI	Slovenia
AL	Albania	FI	Finland	LT	Lithuania	SK	Slovakia
AM	Armenia	FR	France	LU	Luxembourg	SN	Senegal
AT	Austria		Gabon	LV	Latvia	SZ	Swaziland
ΑU	Australia	GA		MC	Monaco	TD	Chad
ΑZ	Azerbaijan	GB	United Kingdom	MD	Republic of Moldova	TG	Togo
BA	Bosnia and Herzegovina	GE	Georgia	MG	•	TJ	Tajikistan
BB	Barbados	GH	Ghana		Madagascar	TM	Turkmenistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TR	Turkey
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TT	Trinidad and Tobago
BG	Bulgaria	HU	Hungary	ML	Mali		Ukraine
BJ	Benin	ΙE	Ireland	MN	Mongolia	UA	
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Câte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	ΚZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/01296

IPC(6) : G06K							
US CL: 382/100, 135, 139, 162, 167, 306 According to International Patent Classification (IPC) or to both national classification and IPC							
B. FIELDS SE							
Minimum documen	ntation searched (classification system followe	ed by classification symbols)					
	00, 135, 139, 162, 167, 306						
Documentation sear	rched other than minimum documentation to the	e extent that such documents are included i	n the fields searched				
1	e consulted during the international search (names: Digital watermarks, color, HSI, RGB	ame of data base and, where practicable,	, search terms used)				
C. DOCUMEN	ITS CONSIDERED TO BE RELEVANT						
Category* Ci	itation of document, with indication, where a	ppropriate, of the relevant passages	Relevant to claim No.				
fig.	5,617,119 A (BRIGGS et al) 01 Ap 5, element 505-507; fig. 6, element lines 10-67; col. 18, lines 15-30.	oril 1997, fig. 3, element 302; at 600; col. 9, lines 3-60; col.	1-15				
	5,530,759 A (BRAUDAWAY et al.); fig. 1, element 104; col. 3, line		1-15				
	US 5,493,677 A (BALOGH et al.) 20 February 1996, col. 10, lines 4, 5 45-67.						
Y US 5 60.	5,664,018 A (LEIGHTON) 02 Sep	tember 1997, col. 2, lines 30-	4, 5 13, 14				
	5.687,236 A (MOSKOWITZ et al s 5-40.) 11 November 1997, col. 5,	1-15				
	The second in the continuation of Page						
	unents are listed in the continuation of Box C						
"\" ducument de	cories of cited documents. Hinning the general state of the art which is not considered Hicular relevance	"T" later document published after the inte date and not in conflict with the appli the principle or theory underlying the	cation but cited to understand				
18" earlier dooin	ment published on or after the international filing date	"X" document of particular relevance; the considered novel or cannot be consider when the document is taken alone	ed to involve an inventive step				
cited to estat special reason dicument re- means	claimed invention cannot be step when the document is documents, such combination te art						
ip* document on the priority d	blished prior to the international filing date but later than rate cluimed	"L" document member of the same patent					
Date of the actual c	completion of the international search	Date of mailing of the international sear	rch report				
01 JULY 1999		1 6 JUL 1999					
Commissioner of Pa Box PCT							
Washington, D.C. 2 Facsimile No. (70	03) 305-3230	Telephone No. (703) 308-7728					